





hellebeuk

Technisch Handelsbureau

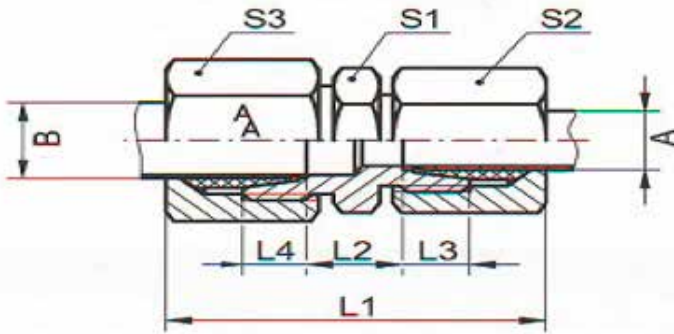

Rechte verloopkoppeling

	PN/Bar	L1	L2	L3	L4	S1	S2	S3
Rechte verloopkoppeling L 8 mm - 6 mm	315	40,0	11,0	7,0	7,0	14	17	14
Rechte verloopkoppeling L 10 mm - 6 mm	315	41,0	12,0	7,0	7,0	17	19	14
Rechte verloopkoppeling L 10 mm - 8 mm	315	41,0	13,0	7,0	7,0	17	19	17
Rechte verloopkoppeling L 12 mm - 6 mm	315	42,0	13,0	7,0	7,0	19	22	14
Rechte verloopkoppeling L 12 mm - 8 mm	315	42,0	14,0	7,0	7,0	19	22	17
Rechte verloopkoppeling L 12 mm - 10 mm	315	43,0	14,0	7,0	7,0	19	22	19
Rechte verloopkoppeling L 15 mm - 6 mm	315	43,5	16,0	7,0	7,0	24	27	14
Rechte verloopkoppeling L 15 mm - 8 mm	315	43,5	15,0	7,0	7,0	24	27	17
Rechte verloopkoppeling L 15 mm - 10 mm	315	44,5	15,0	7,0	7,0	22	27	19
Rechte verloopkoppeling L 15 mm - 12 mm	315	45,0	15,5	7,0	7,0	22	27	22
Rechte verloopkoppeling L 18 mm - 8 mm	315	45,0	17,0	7,5	7,0	27	32	17
Rechte verloopkoppeling L 18 mm - 10 mm	315	46,0	16,5	7,5	7,0	27	32	19
Rechte verloopkoppeling L 18 mm - 12 mm	315	47,0	17,5	7,5	7,0	27	32	22
Rechte verloopkoppeling L 18 mm - 15 mm	315	47,5	16,5	7,5	7,0	27	32	27
Rechte verloopkoppeling L 22 mm - 10 mm	160	49,5	17,5	7,5	7,0	32	36	19
Rechte verloopkoppeling L 22 mm - 12 mm	160	48,0	17,0	7,5	7,0	32	36	22
Rechte verloopkoppeling L 22 mm - 15 mm	160	51,0	21,5	7,5	7,0	32	36	27
Rechte verloopkoppeling L 22 mm - 18 mm	160	54,0	21,0	7,5	7,5	32	36	32
Rechte verloopkoppeling L 28 mm - 10 mm	160	52,0	21,0	7,5	7,0	41	41	19
Rechte verloopkoppeling L 28 mm - 12 mm	160	51,0	21,0	7,5	7,0	41	41	22
Rechte verloopkoppeling L 28 mm - 15 mm	160	54,0	21,5	7,5	7,0	41	41	27
Rechte verloopkoppeling L 28 mm - 18 mm	160	55,0	19,0	7,5	7,5	41	41	32
Rechte verloopkoppeling L 28 mm - 22 mm	160	54,0	21,0	7,5	7,5	41	41	36
Rechte verloopkoppeling L 35 mm - 15 mm	160	58,0	22,5	10,5	7,0	46	50	27
Rechte verloopkoppeling L 35 mm - 18 mm	160	58,0	21,5	10,5	7,5	46	50	32
Rechte verloopkoppeling L 35 mm - 22 mm	160	60,0	22,5	10,5	7,5	46	50	36
Rechte verloopkoppeling L 35 mm - 28 mm	160	59,0	21,0	10,5	7,5	46	50	41
Rechte verloopkoppeling L 42 mm - 15 mm	160	60,0	23,0	11,0	7,0	55	60	27
Rechte verloopkoppeling L 42 mm - 18 mm	160	60,5	23,0	11,0	7,5	55	60	32
Rechte verloopkoppeling L 42 mm - 22 mm	160	61,5	23,0	11,0	7,5	55	60	36
Rechte verloopkoppeling L 42 mm - 28 mm	160	61,5	23,0	11,0	7,5	55	60	41
Rechte verloopkoppeling L 42 mm - 35 mm	160	66,5	21,5	11,0	10,5	55	60	50

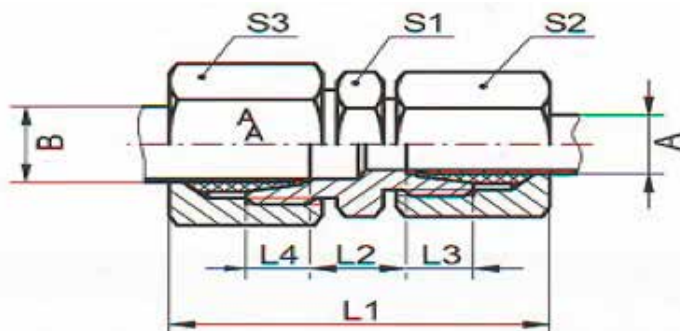

Rechte verloopkoppeling

	PN/Bar	L1	L2	L3	L4	S1	S2	S3
Rechte verloopkoppeling S 8 mm - 6 mm	630	47,0	16,5	7,0	7,0	17	19	17
Rechte verloopkoppeling S 10 mm - 6 mm	630	48,0	17,5	7,5	7,0	19	22	17
Rechte verloopkoppeling S 10 mm - 8 mm	630	48,0	17,5	7,5	7,0	19	22	19
Rechte verloopkoppeling S 12 mm - 6 mm	630	50,0	19,5	7,5	7,0	22	24	17
Rechte verloopkoppeling S 12 mm - 8 mm	630	50,0	20,0	7,5	7,0	22	24	19
Rechte verloopkoppeling S 12 mm - 10 mm	630	51,0	19,5	7,5	7,5	22	24	22
Rechte verloopkoppeling S 14 mm - 8 mm	630	53,0	20,0	8,0	7,0	24	27	19
Rechte verloopkoppeling S 14 mm - 10 mm	630	54,0	20,5	8,0	7,5	24	27	22
Rechte verloopkoppeling S 14 mm - 12 mm	630	54,0	20,5	8,0	7,5	24	27	24
Rechte verloopkoppeling S 16 mm - 6 mm	400	53,0	20,0	8,5	7,0	27	30	17
Rechte verloopkoppeling S 16 mm - 8 mm	400	53,5	20,5	8,5	7,0	27	30	19
Rechte verloopkoppeling S 16 mm - 10 mm	400	54,5	20,0	8,5	7,5	27	30	22
Rechte verloopkoppeling S 16 mm - 12 mm	400	54,5	20,0	8,5	7,5	27	30	24
Rechte verloopkoppeling S 16 mm - 14 mm	400	57,0	21,5	8,5	8,0	27	30	27
Rechte verloopkoppeling S 20 mm - 10 mm	400	59,5	22,0	10,5	7,5	32	36	22
Rechte verloopkoppeling S 20 mm - 12 mm	400	59,5	21,0	10,5	7,5	32	36	24
Rechte verloopkoppeling S 20 mm - 14 mm	400	62,5	22,0	10,5	8,0	32	36	27
Rechte verloopkoppeling S 20 mm - 16 mm	400	62,5	23,0	10,5	8,5	32	36	30
Rechte verloopkoppeling S 25 mm - 10 mm	400	61,5	23,0	12,0	7,5	41	46	22
Rechte verloopkoppeling S 25 mm - 12 mm	400	61,5	23,0	12,0	7,5	41	46	24
Rechte verloopkoppeling S 25 mm - 14 mm	400	64,5	26,0	12,0	8,0	41	46	27
Rechte verloopkoppeling S 25 mm - 16 mm	400	64,5	22,5	12,0	8,5	41	46	30
Rechte verloopkoppeling S 25 mm - 20 mm	400	71,5	24,5	12,0	10,5	41	46	36
Rechte verloopkoppeling S 30 mm - 12 mm	400	67,0	23,5	13,5	7,5	46	50	24
Rechte verloopkoppeling S 30 mm - 14 mm	400	68,0	23,5	13,5	8,0	46	50	27
Rechte verloopkoppeling S 30 mm - 16 mm	400	72,0	26,5	13,5	8,5	46	50	30
Rechte verloopkoppeling S 30 mm - 20 mm	400	74,0	26,0	13,5	10,5	46	50	36
Rechte verloopkoppeling S 30 mm - 25 mm	400	77,0	26,5	13,5	13,5	46	50	46
Rechte verloopkoppeling S 38 mm - 16 mm	250	75,0	25,5	16,0	8,5	55	60	30
Rechte verloopkoppeling S 38 mm - 20 mm	250	77,0	26,0	16,0	10,5	55	60	36
Rechte verloopkoppeling S 38 mm - 25 mm	250	84,0	31,5	16,0	12,0	55	60	46
Rechte verloopkoppeling S 38 mm - 30 mm	250	87,0	29,5	16,0	13,5	55	60	50